

Model	Applicable To	File Under	Bulletin No.
1997 PRELUDE	ALL	BODY	97-038
			Issue Date MAY 1997

## Whistle From Windshield

### SYMPTOM

A whistling sound from the top, center area of the windshield at highway speeds.

### PROBABLE CAUSE

The upper windshield molding is vibrating.

### CORRECTIVE ACTION

Apply sealant under the upper windshield molding.

### REQUIRED MATERIALS

Masking tape (at least 5 cm wide)

3M Black Super Silicone Sealant:  
3M P/N 051135-08662


3M General Purpose Adhesive Cleaner:  
3M P/N 051135-08984

### DIAGNOSIS


Drive the vehicle at highway speeds, and listen for a whistling sound. While driving, push up against the top of the windshield in front of the rearview mirror; if the sound changes, go to **REPAIR PROCEDURE**.

### REPAIR PROCEDURE

1. To protect the roof, apply masking tape (at least 5 cm wide) along the edge of the entire upper windshield molding.

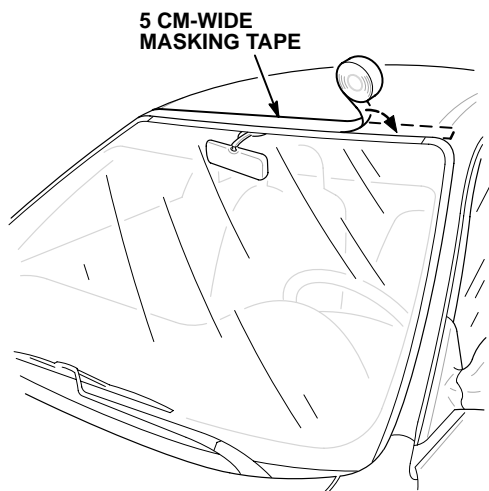

2. Pull up the upper windshield molding using an O-ring pick or similar tool, and apply 3M Black Super Silicone Sealant under the entire molding.

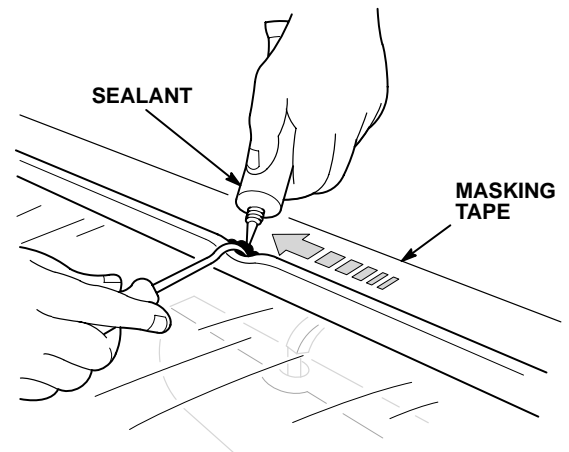

3. Press the rubber molding to smooth it out and make sure it sits flush.
4. Allow the sealant to set for about 5 minutes. Remove the masking tape, and clean up any excess silicone with 3M General Purpose Adhesive Cleaner.

### WARRANTY CLAIM INFORMATION

**In warranty:** The normal warranty applies.